




PROPORTIONAL LIFT SAFETY VALVE WITH SPRING



TYPE NST-OKV/Y

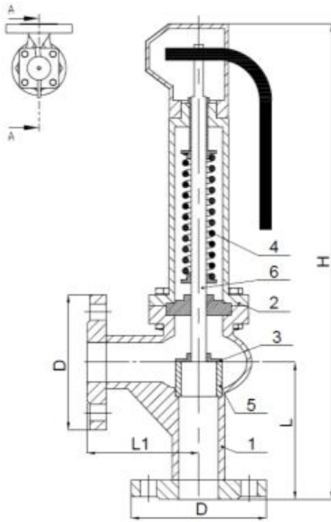

NO	DESCRIPTION	MATERIAL
1	BODY	EN GJL 250 / EN GJS 400-15
2	COVER	EN GJL 250 / EN GJS 400-15
3	SEAT	X5CrNi18-8 - AISI302
4	SPRING	X12CrNi18-8 - AISI302
5	FLAP	X5CrNi18-10 - AISI304
6	SHAFT	X5CrNi18-10 - AISI304

TECHNICAL SPECIFICATIONS

OPERATING TEMPERATURE (°C)	16 BAR - 10 ~ +120 13 BAR 200 °C 11 BAR 250 °C 10 BAR 300 °C
CONNECTION SIZES	TS EN 1092-2 (PN16)
NOMINAL PRESSURE (BAR)	PN6
FACE TO FACE DIMENSIONS	TS EN 558
DESIGN	TS EN ISO 4126
TESTS	TS EN 12266-1

DIMENSIONS

SIZE	D	L1	L	H
DN25	115	100	105	405
DN32	140	105	115	410
DN40	150	115	140	430
DN50	165	125	150	480
DN65	185	145	170	512
DN80	200	155	195	555

CONNECTIONS

FLANGED

SIZE	DN25	DN32	DN40	DN50	DN65	DN80
WEIGHTS (KGS)	9,8	11,7	13,8	17	26,5	30



PLEASE CONSULT OUR SALES STAFF FOR OUR FULL LIFT SAFETY VALVE

