

**TİP:P-K 707 / NE7M-G9**


Fatura / Rabbet  
Pim Kanalı / Pin Canal  
Sabit Eleman / Stationary Element

Max.Sıcaklık / Max Temperature : -35+160°C  
Max.Basınç / Max. Pressure : 15bar  
Max.Hız / Max. Speed : 20m/s

Sabit yüzey : Karbon (CB),Silisyum karbür (SIC)  
(G9 tipi, pim kanallı,faturalı),Paslanmaz çelik 316  
Stationary surface : Carbon (CB),Silisium carbide  
(SIC) (G9 type, with pin canal,rabbet),Stainless steel 316

O-ring Malzemesi : Viton  
O-ring Material : Viton

707 ve 407 model salmastralar için yedek sabit yüzey.  
Spare stationary face for model 707 and model 407 .

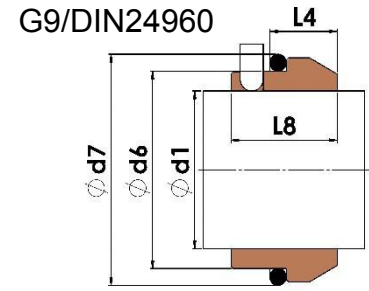

### ÜRÜN AÇIKLAMASI / PRODUCT DESCRIPTION

Sabit yüzey seçenekleri (silisyum karbür,seramic vs.) sipariş esnasında satış ekibine bildirilmelidir.

**Stationary face options (silisium carbide,ceramics,etc.) should be pre-informed to our sales staff while placing an order.**

MODEL	Mil çapı / Stem dia Ød1	d6	d7	L8	L4
Duramech P-K 707 / NE7M x 10	10	17	21	17.5	10.0
Duramech P-K 707 / NE7M x 12	12	19	23	17.5	10.0
Duramech P-K 707 / NE7M x 14	14	21	25	17.5	10.0
Duramech P-K 707 / NE7M x 16	16	23	27	17.5	10.0
Duramech P-K 707 / NE7M x 18	18	27	33	19.5	11.5
Duramech P-K 707 / NE7M x 20	20	29	35	19.5	11.5
Duramech P-K 707 / NE7M x 22	22	31	37	19.5	11.5
Duramech P-K 707 / NE7M x 24	24	33	39	19.5	11.5
Duramech P-K 707 / NE7M x 25	25	34	40	19.5	11.5
Duramech P-K 707 / NE7M x 28	28	37	43	19.5	11.5
Duramech P-K 707 / NE7M x 30	30	39	45	19.5	11.5
Duramech P-K 707 / NE7M x 32	32	42	48	19.5	11.5
Duramech P-K 707 / NE7M x 33	33	42	48	19.5	11.5
Duramech P-K 707 / NE7M x 35	35	44	50	19.5	11.5
Duramech P-K 707 / NE7M x 38	38	49	56	22.0	14.0
Duramech P-K 707 / NE7M x 40	40	51	58	22.0	14.0
Duramech P-K 707 / NE7M x 43	43	54	61	22.0	14.0
Duramech P-K 707 / NE7M x 45	45	56	63	22.0	14.0
Duramech P-K 707 / NE7M x 48	48	59	66	22.0	14.0
Duramech P-K 707 / NE7M x 50	50	62	70	23.0	15.0
Duramech P-K 707 / NE7M x 53	53	65	73	23.0	15.0
Duramech P-K 707 / NE7M x 55	55	67	75	23.0	15.0
Duramech P-K 707 / NE7M x 58	58	70	78	23.0	15.0
Duramech P-K 707 / NE7M x 60	60	72	80	23.0	15.0
Duramech P-K 707 / NE7M x 65	65	77	85	23.0	15.0
Duramech P-K 707 / NE7M x 68	68	81	90	26.0	18.0
Duramech P-K 707 / NE7M x 70	70	83	92	26.0	18.0
Duramech P-K 707 / NE7M x 75	75	88	97	26.0	18.0
Duramech P-K 707 / NE7M x 80	80	95	105	26.2	18.2
Duramech P-K 707 / NE7M x 85	85	100	110	26.2	18.2
Duramech P-K 707 / NE7M x 90	90	105	115	26.2	18.2
Duramech P-K 707 / NE7M x 95	95	110	120	25.2	17.2
Duramech P-K 707 / NE7M x100	100	115	125	25.2	17.2